



YUR.POWER



S-P230

Multicrystalline Solar Panels

Specifications

· Panel Type	230 Wp Multicrystalline silicon photovoltaic module
· Maximum Power (Pmax)	230 W
· Voltage @ Pmax (Vpm)	29,38 V
· Current @ Pmax (Ipm)	7,84 A
· Open Circuit Voltage (Voc)	37,42 V
· Short Circuit Current (Isc)	8,51 A
· Fuse Rating	15 A
· Power Tolerance	0 +3 %
· Maximum System Voltage	1000 V
· Efficiency	14,03 %
· Temperature Coefficients of Pmax (%)	-0,4147 % /°K
· Temperature Coefficients of Voc (%)	-0,3003 % /°K
· Temperature Coefficients of Isc (%)	+0,0254 % /°K
· N.O.C.T(Nominal Operating Cell Temp)	47,6 °C
· System Cell	6" x 6" Multicrystalline silicon
· No. of cells	60 pcs
· Module Size (WxLxH)	1652 x 992 x 50 mm
· Weight	Approximately 22 Kg
· Certification	IEC 61215 / IEC 61730 / ISO 9001 :14001 / REACH

Module dimension

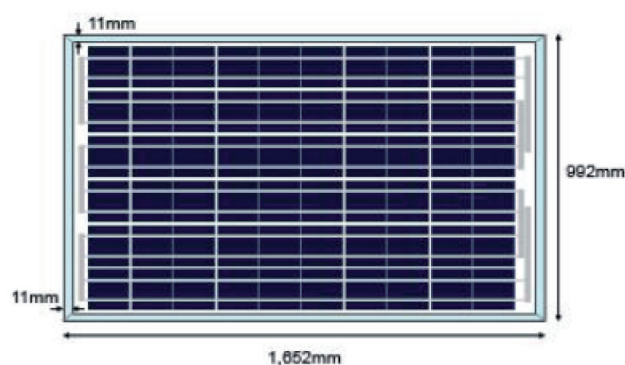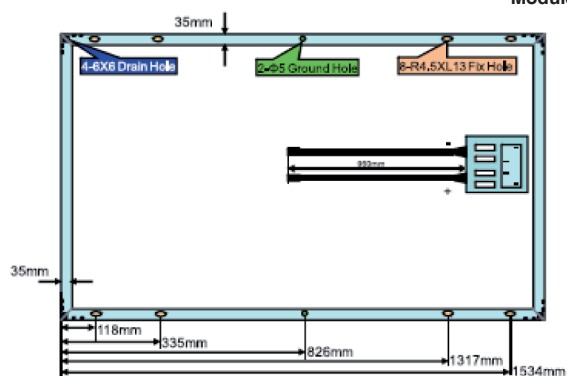

measured at STC (Standard Test Condition; 1000 W/m² irradiance, AM 1.5G and 25 °C)

Warranty Notice: 5 years on materials. 10 years of 90 % output, 25 years of 80 % output

EAN : TBA

Yuraku Pte Ltd
 11 Collyer Quay,
 #10-04 The Arcade, Singapore 049 317
 Tel: +65 6238 2158
 Fax: +65 6238 0076
 Website: www.yuraku.com.sg

Yuraku S.r.l
 Via Fratelli Rosselli 3/2
 20019 Settimo Milanese (MILANO) Italy
 Tel: +39 02 3351 4444
 Fax: +39 02 3359 0580
 Website: www.yuraku.it

Yuraku, SL
 C/Florida Nº 1 (nave 4) Pol. Ind. Villapark
 28670 – Villaviciosa de Odón – Madrid – España
 Tel: +34 91 6657 423
 Fax: +34 91 6166 324
 Website: www.yuraku.es

create >> excite >> inspire

Terms and Specifications are subjected to change without notice.
 ©2011 YURAKU PTE LTD