




YURAKU®

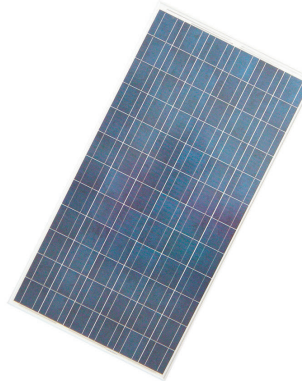

YUR.POWER A-P216



Multicrystalline
Solar Panels

Specifications

• Panel Type	216Wp Multicrystalline silicon photovoltaic module
• Maximum Power (Pmax)	216W
• Voltage @ Pmax (Vpm)	29,6V
• Current @ Pmax (Ipm)	7,29A
• Open Circuit Voltage (Voc)	36,1V
• Short Circuit Current (Isc)	7,86A
• Output Tolerance	± 3%
• Maximum System Voltage	1000 Vdc
• Series fuse rating	10A
• Application	DC 24V system
• Efficiency of module	13,2%
• Temperature Coefficients of Pmax (%)	-0,38% /°C
• Temperature Coefficients of Voc (%)	-0,32% /°C
• Temperature Coefficients of Isc (%)	+0,08% /°C
• NOCT (Norminal Operating Cell Temp)	44,8°C
• Operating Temperature	-40 to +90°C
• Storage Temperature	-40 to +90°C
• System Cell	6" Multicrystalline silicon
• No. of cells & connections	60pcs in series (6x10)
• Module Size (WxLxH)	1631 x 993 x 50mm
• Weight	approximately 20,43Kg
• Packing configuration	Horizontal
• Size of carton	1689 x 1071 x 955mm
• Pallet quantity	18pcs / pallet
• Container Load (20ft/40ft)	12 pallets / 26 pallets

Construction

• Front	High transmission low-iron tempered glass (3.2mm)
• Back	PVF / PET / PVF
• Encapsulates	EVA
• Junction Box Type	IP65, weatherproof
• Bypass Diodes	3 diodes to avoid power decreasing by shade
• Output cable	4mm ² cable with polarized waterproof tyco connectors (Negative 900mm, Positive 900mm)
• Frame (Material, Corners, etc)	Clear anodized aluminium, AL6063-T5
• Certification	IEC 61215 : 2005 + EN 61730-1 / EN 61730-3 : 2007

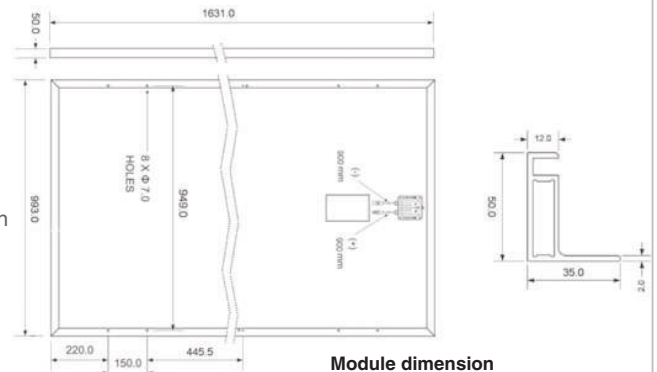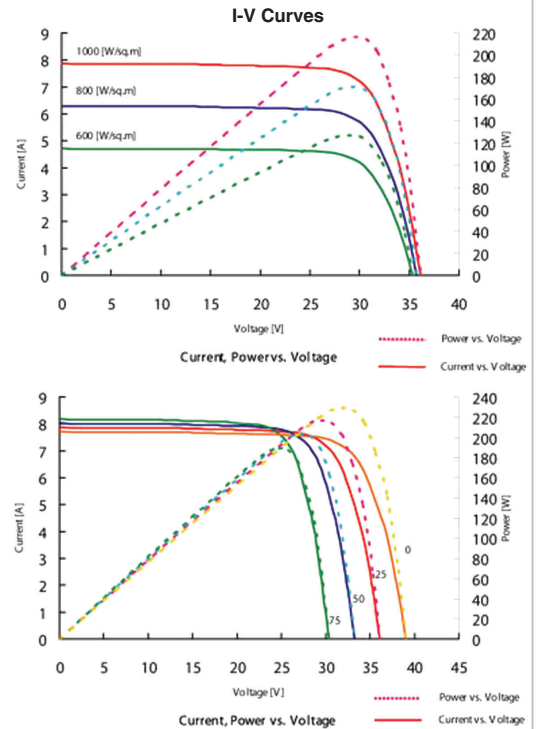

*measured at STC (Standard Test Condition; 1000W/m² irradiance, AM 1.5G and 25°C)

Warranty Notice: 5 years on materials. 10 years of 90% output, 25 years of 80% output

EAN : TBA

Yuraku Pte Ltd
40 Ubi Crescent,
#01-02 Ubi Techpark, Singapore 408 567
Tel: +65 6238 2158
Fax: +65 6238 0076
Website: www.yuraku.com.sg

Yuraku S.r.l
Via Galvani 36/38
20019 Settimo Milanese (MILANO) Italy
Tel: +39 02 33514444
Fax: +39 02 335590580
Website: www.yuraku.it

Yuraku, SL
C/Florida Nº 1 (nave 4) Pol. Ind. Villapark
28670 – Villaviciosa de Odón – Madrid – España
Tel: +34 91 665 74 23
Fax: +34 91 616 63 24
Website: www.yuraku.es

create >> excite >> inspire

Terms and Specifications are subjected to change without notice.
©2009 YURAKU PTE LTD