



YUR.POWER

G-P210



Multicrystalline Solar Panels

Specifications



• Panel Type	210 Wp Multicrystalline silicon photovoltaic module
• Maximum Power (Pmax)	210 W
• Voltage @ Pmax (Vpm)	29,0 V
• Current @ Pmax (Ipm)	7,24 A
• Open Circuit Voltage (Voc)	36,5 V
• Short Circuit Current (Isc)	7,88 A
• Power Tolerance	± 5 %
• Maximum System Voltage	1000 V
• Maximum series fuse rating	15 A
• Temperature Coefficients of Pmax (%)	-0,38 % /°C
• Temperature Coefficients of Voc (%)	-0,32 % /°C
• Temperature Coefficients of Isc (%)	+0,08 % /°C
• NOCT (Norminal Operating Cell Temp)	46 °C ± 2 °C
• Operating Temperature	-40 to +85 °C
• System Cell	156 mm x 156 mm Multicrystalline silicon
• No. of cells & connections	60 pcs in series (6x10)
• Module Size (WxLxH)	1640 x 990 x 50 mm
• Weight	Approximately 19 Kg
• Relative humidity	0 to 100 %
• Resistances	227g steel ball fall down from 1 m height and 60 m/s wind
• Mechanical load test	2400 Pa

Construction

• Front	Glass
• Encapsulation	EVA/Cells/EVA/TPT
• Bypass Diodes	3 by-pass
• Junction Box Type	IP65 TUV certified
• Output cable	MC Type connectors TÜV (Negative 1100 mm, Positive 1100 mm)
• Frame (Material, Corners, etc)	Anodized aluminium
• Certification	CE / IEC 61215 / IEC 61730-1 / IEC 61730-2

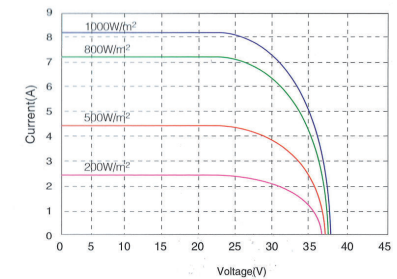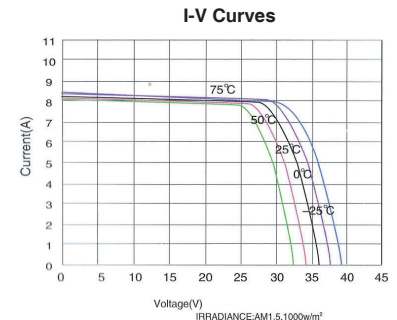

Module dimension

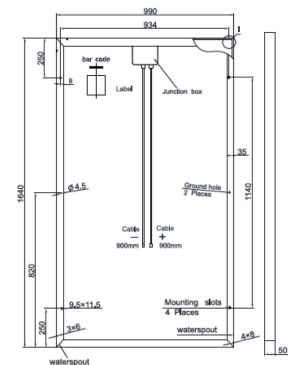

measured at STC (Standard Test Condition; 1000 W/m² irradiance, AM 1.5G and 25 °C)

Warranty Notice: 5 years on materials. 10 years of 90 % output, 25 years of 80 % output

EAN : TBA

Yuraku Pte Ltd
 11 Collyer Quay,
 #10-04 The Arcade, Singapore 049 317
 Tel: +65 6238 2158
 Fax: +65 6238 0076
 Website: www.yuraku.com.sg

Yuraku S.r.l
 Via Fratelli Rosselli 3/2
 20019 Settimo Milanese (MILANO) Italy
 Tel: +39 02 3351 4444
 Fax: +39 02 3359 0580
 Website: www.yuraku.it

Yuraku, SL
 C/Florida Nº 1 (nave 4) Pol. Ind. Villapark
 28670 – Villaviciosa de Odón – Madrid – España
 Tel: +34 91 6657 423
 Fax: +34 91 6166 324
 Website: www.yuraku.es

create >> excite >> inspire

Terms and Specifications are subjected to change without notice.
 ©2011 YURAKU PTE LTD